


# FEBE



## Mechanical data:


Mounting: suspended  
Casing: steel

## Optical data:

Light distribution: symmetric  
Lighting: direct


## Other data:

Contains light source: yes  
Available on request: DIM DALI  
Application: offices, receptions, shops, private apartments

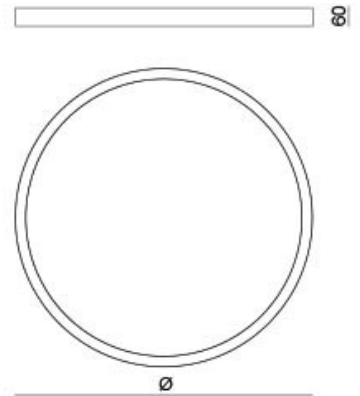


One of the new products presented at the L & B trade fair is the suspended FEBE luminaire. A thin ring that will give the interior the right character. Some of the advantages of FEBE are modern LED sources with high luminous efficiency, low glare. The luminaire is equipped with lenses that direct the light straight down without blinding a person standing next to it, at the same time causing doubts from where the light comes. Ideally suited for lighting hotel reception, lobbies, restaurants.


## Photometric body




11.98123.00.10.C




11.98123.00.25.C



11.98123.00.40.C



11.98123.00.60.C



11.98123.00.61.C

## Projects



Carrefour, Morocco, Africa

### C - color

#### L - lenses to choose:

10 = 10°

25 = 25°

40 = 40°

60 = 60°

61 = 30x65°



cold white

03 matt

93 glossy

warm white

10 matt

91 glossy

light grey

06 matt

96 glossy

grey

07 matt

97 glossy

grey graphite

80 matt

84 glossy

anthracite

70 matt

76 glossy

black

05 matt

95 glossy

Feeder mounted outside  
of the luminaire

Catalogue code	Light source	Light flux	Power	Color temperature	Dimensions
11.60083.00.00.LC	POWER LED	8x100 lm	10W	3000K	Ø600
11.60084.00.00.LC	POWER LED	8x100 lm	10W	4000K	Ø600
11.98123.00.00.LC	POWER LED	12x100 lm	15W	3000K	Ø980
11.98124.00.00.LC	POWER LED	12x100 lm	15W	4000K	Ø980
11.12163.00.00.LC	POWER LED	16x100 lm	19W	3000K	Ø1200
11.12164.00.00.LC	POWER LED	16x100 lm	19W	4000K	Ø1200