



**LED**

Norms: EN 60598-1, EN 60598-2-1



**PRODUCT DESCRIPTION**

**Areas of Application:** Commercial, Business areas, Housing, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

**Mounting:** Suspended.

**Light Distribution:** Direct / Indirect.

**Light Source:** LED 4000K, CRI>90, 60.000h life (@L80, B10, Ta 25 °C).


**Optical System:** Diffuser: Opal polycarbonate.

**Control Gear:** Not included.

**Materials:** Body: Extruded aluminium.

**Surface Finish:** Powder coated.

bLINE - Opal polycarbonate diffuser

 LED	UGR	W	Lm	V	η(%)	AxB(mm)	kg	ORDER CODE
	≤22	28	2600	24	46	Ø650x35	2	90425.L650.0
	≤19	42	3900	24	50	Ø970x35	3	90425.L970.0
	≤19	54	5070	24	51	Ø1255x35	4	90425.L125.0
	≤19	67	6240	24	55	Ø1540x35	5	90425.L154.0
	-	85	7930	24	-	Ø1955x35	6	90425.L195.0

Note:  
To complete the product add ceiling rose. Please order separately. Suspension kit is included in the product (1,5 m).  
In versions Ø1540mm and Ø1955mm, the product includes the transparent current supply cable.  
In the option TW and RGBW, the product mandatorily includes the transparent current supply cable.


Example code for order: 90425.L970.0 (ORDER CODE) + W(COLOUR/FINISH) + R000 + 9763(OPTIONS)

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH

Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
N	Jungle
D	Golden eye
O	Sahara
L	Autumn
R	Rusty chain
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon

DIMENSIONS

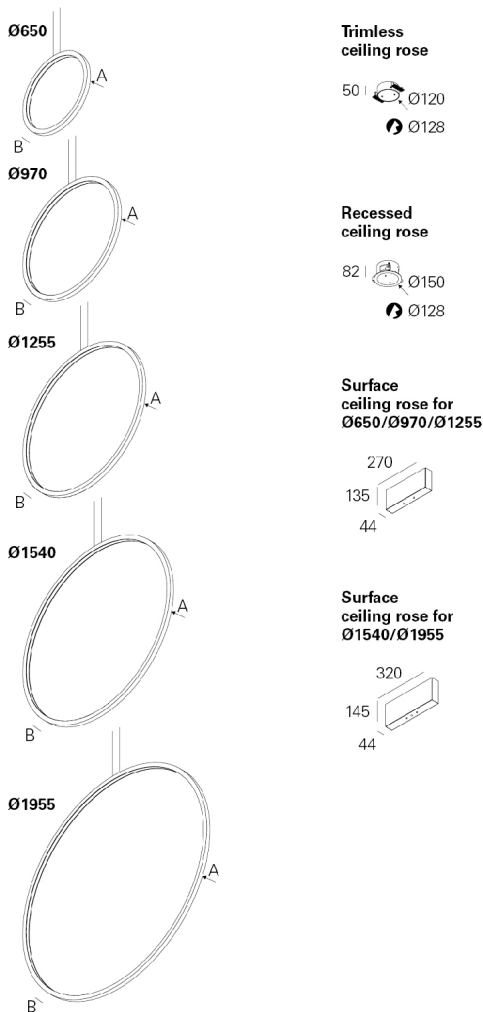

Trimless ceiling rose



Recessed ceiling rose



Surface ceiling rose for Ø650/Ø970/Ø1255




Surface ceiling rose for Ø1540/Ø1955



OPTIONS

Colour temperature



	Order code
2700K	<b>2000</b>
Tunable White (3000K - 5700K)	<b>T000</b>
RGB White (2700K)	<b>R000</b>

• TW and RGBW are only available with OmniaControl.

Surface ceiling rose



	Order code
HF	<b>9761</b>
DALI	<b>9762</b>
OmniaControl (Voice/App)	<b>9763</b>

• To complete this option, please add ceiling rose colour.

Recessed ceiling rose



	Order code
HF	<b>9764</b>
DALI	<b>9765</b>
OmniaControl (Voice/App)	<b>9766</b>

• To complete this option, please add ceiling rose colour.

Trimless ceiling rose




	Order code
HF	<b>9767</b>
DALI	<b>9768</b>
OmniaControl (Voice/App)	<b>9769</b>


• To complete this option, please add ceiling rose colour.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.


### PHOTOMETRY




OREO V In Ø650mm  
bLINE 4000K



OREO V In Ø970mm  
bLINE 4000K



OREO V In Ø1255mm  
bLINE 4000K



OREO V In Ø1540mm  
bLINE 4000K

### TO SPECIFY:

Circular LED luminaire, for vertical suspension. Extruded aluminium body with 35x35mm, epoxy polyester powder-coated. Available in 5 sizes (Ø650, 970, 1255, 1540 and 1955mm), with bLINE diffuser, opal polycarbonate clip-in diffuser. With inward light. Standard version in 4000K LED, CRI>90, 60.000h lifetime (@L80, B10, Ta 25 C) and without any visible power-supply cable. Ceiling rose available as recessed mounted with trim or trimless, or surface mounted, in on/off, dimmable DALI or with OmniaControl. 2700K, Tunable White and RGB White available as options. Available in 16 different colours. – as Roxo Lighting OREO V IN.

We reserve the right to make technical changes without prior notice.  
Electrical/Optical data are subjected to a tolerance of +/-10%.