



LED

Norms: EN 60598-1, EN 60598-2-1



PRODUCT DESCRIPTION

Areas of Application: Commercial, Business areas, Housing, Art and Culture spaces. Offices, Public buildings, Hotel and Restaurant services.

Mounting: Suspended.

Light Distribution: Direct/Indirect.

Light Source: LED 4000K, CRI>90, 60.000h life (@L80, B10, Ta 25 °C).


Optical System: Diffuser: Polycarbonate.

Control Gear: Not included.

Materials: Body: Extruded aluminium.

Surface Finish: Powder coated.

bLINE - Opal polycarbonate diffuser

LED	UGR	W	Lm	V	η(%)	AxB(mm)	kg	ORDER CODE
	≤22	24	2210	24	55	Ø630x35	2	90419.L630.0
	≤22	38	3510	24	53	Ø950x35	3	90419.L950.0
	≤19	51	4810	24	55	Ø1270x35	4	90419.L127.0
	≤19	64	5980	24	52	Ø1555x35	5	90419.L155.0
	-	82	7670	24	-	Ø1970x35	6	90419.L197.0

Note:
To complete the product add ceiling rose. Please order separately. Suspension kit is included in the product (1,5 m).
In versions Ø1555mm and Ø1970mm, the product includes the transparent current supply cable.
In the option TW and RGBW, the product mandatorily includes the transparent current supply cable.


Example code for order: 90419.L630.0 (ORDER CODE) + W(COLOUR/FINISH) + R000 + 9763(OPTIONS)

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.

COLOUR / FINISH

Code	Description
W	White
G	Grey
B	Black
U	Blue
V	Green
T	Yellow
K	Red
N	Jungle
D	Golden eye
O	Sahara
L	Autumn
R	Rusty chain
C	Pure chocolate
1	Mist
9	Dark rock
I	Carbon

DIMENSIONS

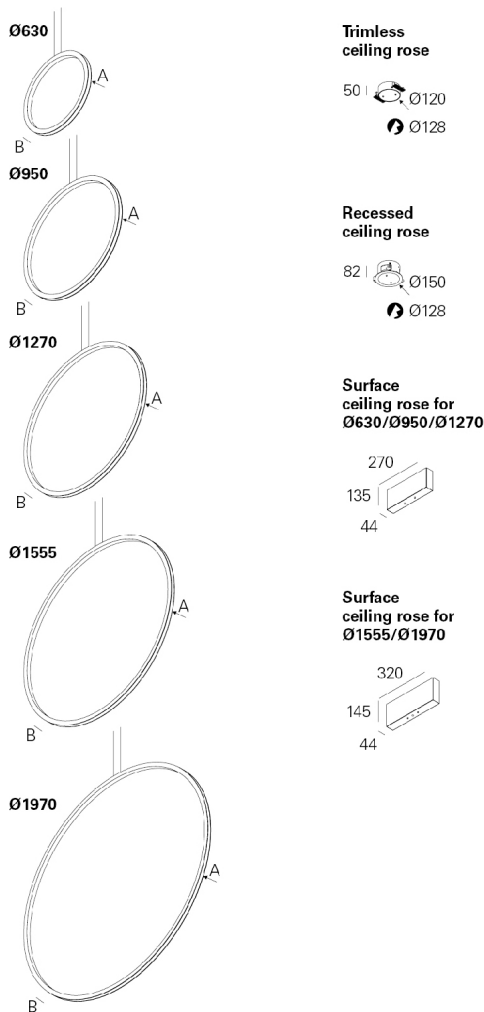

Trimless ceiling rose



Recessed ceiling rose



Surface ceiling rose for Ø630/Ø950/Ø1270




Surface ceiling rose for Ø1555/Ø1970



OPTIONS

Colour temperature



	Order code
2700K	2000
Tunable White (3000K - 5700K)	T000
RGB White (2700K)	R000

• TW and RGBW are only available with OmniaControl.

Surface ceiling rose



	Order code
HF	9761
DALI	9762
OmniaControl (Voice/App)	9763

• To complete this option, please add ceiling rose colour.

Recessed ceiling rose



	Order code
HF	9764
DALI	9765
OmniaControl (Voice/App)	9766

• To complete this option, please add ceiling rose colour.

Trimless ceiling rose




	Order code
HF	9767
DALI	9768
OmniaControl (Voice/App)	9769


• To complete this option, please add ceiling rose colour.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.


PHOTOMETRY




OREO V Out Ø630mm
bLINE 4000K



OREO V Out Ø950mm
bLINE 4000K



OREO V Out Ø1270mm
bLINE 4000K



OREO V Out Ø1555mm
bLINE 4000K

TO SPECIFY:

Circular LED luminaire, for vertical suspension. Extruded aluminium body with 35x35 mm, epoxy polyester powder-coated. Available in 5 sizes (Ø630, 950, 1270, 1555 and 1970mm), with bLINE diffuser, opal polycarbonate clip-in diffuser. With outward light. Standard version in 4000K LED, CRI>90, 60.000h lifetime (@L80, B10, Ta 25 C) and without any visible power-supply cable. Ceiling rose available as recessed mounted with trim or trimless, or surface mounted, in on/off, dimmable DALI or with OmniaControl. 2700K, Tunable White and RGB White available as options. Available in 16 different colours. – as Roxo Lighting OREO V OUT.

We reserve the right to make technical changes without prior notice. Electrical/Optical data are subjected to a tolerance of +/-10%.