

TOTEM



Mechanical data:


Mounting: on the ground / foundation required
Casing: aluminum

Optical data:


Light distribution: symmetric
Lighting: direct

Other data:

Contains light source: yes
Type of source: LED
Application: parks, estates, surroundings of office buildings, surroundings of hotels, private properties
Available on request: fuse connector

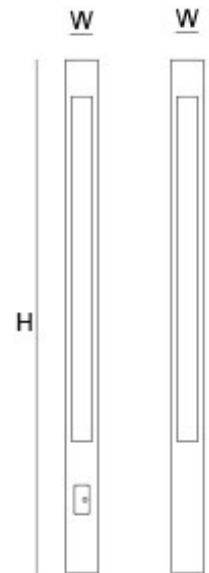

Photometric body










1340.603.C

Gallery



Office building, Poznan

C - color

						
cold white 03 matt 93 glossy	warm white 10 matt 91 glossy	light grey 06 matt 96 glossy	grey 07 matt 97 glossy	grey graphite 80 matt 84 glossy	anthracite 70 matt 76 glossy	black 05 matt 95 glossy

Catalogue code	Light source	Light flux	Power	Color temperature	Dimensions
1340.83.C	LED	950lm	10W	3000K	H=1000 W=160 mm
1340.84.C	LED	950lm	10W	4000K	H=1000 W=160 mm
1340.403.C	LED	4000lm	35W	3000K	H=3500 W=220 mm
1340.603.C	LED	6000lm	53W	3000K	H=3500 W=220 mm
1340.803.C	LED	8000lm	70W	3000K	H=3500 W=220 mm
1340.404.C	LED	4000lm	31W	4000K	H=3500 W=220 mm
1340.604.C	LED	6000lm	47W	4000K	H=3500 W=220 mm
1340.804.C	LED	8000lm	61W	4000K	H=3500 W=220 mm
1340.0403.C	LED	4000lm	35W	3000K	H=4200 W=250 mm
1340.0603.C	LED	6000lm	53W	3000K	H=4200 W=250 mm
1340.0803.C	LED	8000lm	70W	3000K	H=4200 W=250 mm
1340.0404.C	LED	4000lm	31W	4000K	H=4200 W=250 mm
1340.0604.C	LED	6000lm	47W	4000K	H=4200 W=250 mm
1340.0804.C	LED	8000lm	61W	4000K	H=4200 W=250 mm