

| | |
|------------------------|--|
| Colours | <div><div></div><div></div></div> |
| Housing | Aluminium |
| Fixture type | Track light |
| Module | OSRAM LED Linear inside |
| Driver | OSRAM Optotronic |
| Light Output module | 4500lm, 6000lm, 14000lm* |
| CCT | 3000K, 4000K* |
| CRI | >80Ra |
| Beam angles | 30°, 60°, 90° (Symetric or A-Symetric) |
| Adapter | Powergear® 3-phase adapter |
| Rotatable | 0° |
| Tiltable | 0° |
| LED modules | Standard |
| Dimming Options | N/A |
| Options | PMMA Transparant, Translucent |
| Expected Lifetime | 50.000h (L80/B10) |
| Photobiological safety | RG1 unlimited |
| Power factor | > 0.9 |
| LOR | > 90% |
| UGR | < 19 |
| Colour consistency. | 3 SDCM |
| Warranty | 5 years warranty |




| Net Weight | Dimensions carton L x W x H | Qty outer carton |
|------------|-----------------------------|------------------|
| 2900 grams | 122 x 9 x 9 cm | 6 |

* Other specific lumen output or CCT possible upon request

Available LED Modules

| Description | Lumen | Watt | Lm/W | CCT | CRI |
|-----------------------|---------|------|------|----------|-----|
| OSRAM PrevaLED BAR G3 | 4500lm | 27W | 166 | 830, 840 | >80 |
| OSRAM PrevaLED BAR G3 | 6000lm | 47W | 128 | 830, 840 | >80 |
| OSRAM PrevaLED BAR G3 | 14000lm | | | 830, 840 | >80 |

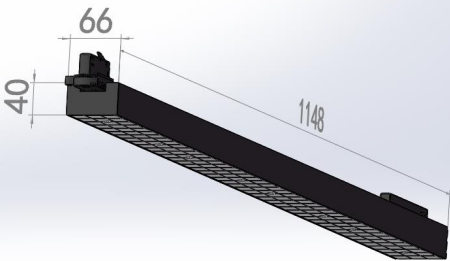

LED modules:
1) Lumen output of LED module (COB)
2) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.
The power of the complete fixture will be slightly higher due to the power consumption of the driver.
3) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.
Technical data can be changed by Internova without prior notice.