

Professional streetlight luminaire for LED light sources.

TECHNICAL DATA

Mounting: on pillar $\varnothing 60/40\text{mm}$, on pillar $\varnothing 76\text{mm}$ - modification .829, on outriggers $\varnothing 60/40\text{mm}$, on outriggers $\varnothing 76\text{mm}$ - modification .829

Body: high pressure die-cast aluminum

Lateral Surface Wind Exposed: 0.039 m²

Colour: gray

Diffuser: tempered glass

ELECTRICAL DATA

Power supply efficiency: $\leq 93\%$

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED, DALI/ED

Electrical connection: max 3x2,5 mm² wire, max 2x2,5 mm² wire, max 3x2,5 mm² / 5x2,5 mm² wire, max 2x2,5 mm² / 4x2,5 mm² wire

OPTICAL DATA

Way of lighting: direct

Type of optic: 033 - for express roads, 034 - for local roads, 035 - for town roads, 036 - for residential area roads, 037P - for pedestrian crossings, right side traffic, 037L - for pedestrian crossings, left side traffic, 038 - for area lighting, 039 - for town and local roads, 040 - for wet surfaces, 013 - for express roads, 014 - for local roads, 015 - for town roads, 016 - for residential area roads, 02 - for express roads, 03 - for local roads, 04 - for town roads, 05 - for residential area roads, 06P - for pedestrian crossings, right side traffic, 06L - for pedestrian crossings, left side traffic, 07 - for area lighting, 08 - for town and local roads, 026 - for wet surfaces, 059 - for local roads, 060 - for town roads, 061 - for residential area roads, 084 - for road lighting, 085 - for road lighting, OP2

GENERAL DATA

ULOR / DLOR: 0% / 100%

Lifetime LED (L90): 100 000 h

Available on request: DALI, DIM 1..10V, LLOC, twilight sensor, knife switch, 10kV surge protection, NTC, NEMA connector, ZHAGA connector. Colour temperature - 2200K: 2700K

Warranty: 5 years

Application: express roads, local roads, town roads, residential area roads, pedestrian crossings, area lighting, avenues, promenade, cycle paths, public spaces, parking areas

Additional information: Tilt adjustment: -15° to +15° (every 5°), CRI/Ra >70

Other remarks: the pole and boom are not part of the luminaire

Additional equipment: additional anti-corrosive protection (index extension: .985), access to the driver chamber without the use of tools (index extension: .825), luminaire with holder for mounting on a $\varnothing 76\text{mm}$ pillar (index extension: .829), luminaire with motion detector (index extension: .862), $\varnothing 60$ adjustable bracket (index extension: .867)



Code	Type of equipment	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]
Type: O33, O34, O35, O36, O37P, O37L, O38, O39, O40 optics							
130222.5L79X.XX1.XXX	ED	23	3150	137	3000	>70	* max +50
130222.5L74X.XX1.XXX	ED	23	3400	148	4000	>70	* max +50
130222.5L80X.XX1.XXX	ED	35	4850	139	3000	>70	* max +50
130222.5L75X.XX1.XXX	ED	35	5200	149	4000	>70	* max +50
130222.5L81X.XX1.XXX	ED	51	7100	139	3000	>70	* max +50
130222.5L76X.XX1.XXX	ED	51	7650	150	4000	>70	* max +50
130222.5L82X.XX1.XXX	ED	68	9350	138	3000	>70	* max +50
130222.5L77X.XX1.XXX	ED	68	10050	148	4000	>70	* max +50

* Lower temperature range: -40°C to -20°C, depending on the type of power supply used (consultation with the LUG Technical Preparation of Production Branch is required).

Please note that the standard luminaire is not intended for use in an environment with an increased corrosivity category. The use of the luminaire for work in an environment for which additional corrosion protection is necessary requires the use of an index with the extension „985 (on request)“.

In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.

Luminous flux tolerance $\pm 10\%$.

Power tolerance $\pm 5\%$.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for $T_a=25^{\circ}\text{C}$.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Date of issue: 27-12-2021

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires.

Code	Type of equipment	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	Operating temperature range [°C]
Type: O33, O34, O35, O36, O37P, O37L, O38, O39, O40 optics							
130222.5L83X.XX1.XXX	ED	102	13500	132	3000	>70	* max +50
130222.5L78X.XX1.XXX	ED	102	14500	142	4000	>70	* max +50
Type: O13, O14, O15, O16 optics							
130222.6L30X.XX1.XXX	DALI/ED	27	3350	124	3000	>70	* max +50
130222.6L84X.XX1.XXX	DALI/ED	27	3400	126	4000	>70	* max +50
130222.6L31X.XX1.XXX	DALI/ED	35	4500	129	3000	>70	* max +50
130222.6L85X.XX1.XXX	DALI/ED	35	4500	129	4000	>70	* max +50
130222.6L32X.XX1.XXX	DALI/ED	51	6600	129	3000	>70	* max +50
130222.6L86X.XX1.XXX	DALI/ED	51	6600	129	4000	>70	* max +50
130222.6L33X.XX1.XXX	DALI/ED	76	10050	132	3000	>70	* max +50
130222.6L87X.XX1.XXX	DALI/ED	76	10100	133	4000	>70	* max +50
130222.6L34X.XX1.XXX	DALI/ED	99	13050	132	3000	>70	* max +50
130222.6L88X.XX1.XXX	DALI/ED	99	13100	132	4000	>70	* max +50
130222.5L35X.XX1.XXX	DALI/ED	128	16150	126	3000	>70	* max +40
130222.6L89X.XX1.XXX	DALI/ED	128	16200	127	4000	>70	* max +40
130222.6L36X.XX1.XXX	DALI/ED	157	19050	121	3000	>70	* max +35
130222.6L90X.XX1.XXX	DALI/ED	157	19050	121	4000	>70	* max +35
Type: O2, O3, O4, O5, O6P, O6L, O7, O8, O26, O59, O60, O61, O84, O85 optics							
130222.5L42X.XX1.XXX	ED	27	3150	117	3000	>70	* max +50
130222.5L01X.XX1.XXX	ED	27	3300	122	4000	>70	* max +50
130222.5L43X.XX1.XXX	ED	36	4150	115	3000	>70	* max +50
130222.5L13X.XX1.XXX	ED	36	4300	119	4000	>70	* max +50
130222.5L44X.XX1.XXX	ED	53	6200	117	3000	>70	* max +50
130222.5L04X.XX1.XXX	ED	53	6400	121	4000	>70	* max +50
130222.5L45X.XX1.XXX	ED	80	9650	121	3000	>70	* max +50
130222.5L07X.XX1.XXX	ED	80	10050	126	4000	>70	* max +50
130222.5L46X.XX1.XXX	ED	102	12700	125	3000	>70	* max +50
130222.5L10X.XX1.XXX	ED	102	13200	129	4000	>70	* max +50
Type: O2, O3, O4, O5, O6P, O6L, O7, O8, O26 optics							
130222.5L02X.XX1.XXX	ED	27	3300	122	5700	>70	* max +50
130222.5L14X.XX1.XXX	ED	36	4300	119	5700	>70	* max +50
130222.5L05X.XX1.XXX	ED	53	6400	121	5700	>70	* max +50
130222.5L08X.XX1.XXX	ED	80	10050	126	5700	>70	* max +50
130222.5L11X.XX1.XXX	ED	102	13200	129	5700	>70	* max +50
Type: OP2 optics							
130222.5L731.111.XXX	ED	80	9300	116	3000	>70	* max +50

* Lower temperature range: -40°C to -20°C, depending on the type of power supply used (consultation with the LUG Technical Preparation of Production Branch is required).

Please note that the standard luminaire is not intended for use in an environment with an increased corrosivity category. The use of the luminaire for work in an environment for which additional corrosion protection is necessary requires the use of an index with the extension .985 (on request).

In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Date of issue: 27-12-2021

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

130222.5L01 . 1. 1.

Type of luminaires

985 Luminaire with an additional anti-corrosion protection - on request

825 Access to the driver chamber without the use of tools - on request

829 Luminaire with holder for mounting on a Ø76mm pillar - on request

862 Luminaire with motion detector - on request

867 Ø60 adjustable bracket - available on request

Type of optic

01 O2 - for express roads

02 O3 - for local roads

03 O4 - for town roads

04 O5 - for residential area roads

05 O6P - for pedestrian crossings, right side traffic

09 O6L - for pedestrian crossings, left side traffic

06 O7 - for area lighting

08 O8 - for town and local roads

10 O26 - for wet surfaces

12 O33 - for express roads

13 O34 - for local roads

14 O35 - for town roads

15 O36 - for residential area roads

16 O37P - for pedestrian crossings, right side traffic

17 O37L - for pedestrian crossings, left side traffic

18 O38 - for area lighting

19 O39 - for town and local roads

20 O40 - for wet surfaces

30 O13 - for express roads

31 O14 - for local roads

32 O15 - for town roads

33 O16 - for residential area roads

35 O59 - for local roads

36 O60 - for town roads

37 O61 - for residential area roads

60 O84 - for road lighting

61 O85 - for road lighting

Protection Class


1 I

2 II

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
Type: O33, O34, O35, O36, O37P, O37L, O38, O39, O40 optics				
130222.5L79X.XX1.XXX	550 250 100	50	1	6.8
130222.5L74X.XX1.XXX	550 250 100	50	1	6.8
130222.5L80X.XX1.XXX	550 250 100	50	1	6.8
130222.5L75X.XX1.XXX	550 250 100	50	1	6.8
130222.5L81X.XX1.XXX	550 250 100	50	1	6.8
130222.5L76X.XX1.XXX	550 250 100	50	1	6.8
130222.5L82X.XX1.XXX	550 250 100	50	1	6.8
130222.5L77X.XX1.XXX	550 250 100	50	1	6.8
130222.5L83X.XX1.XXX	550 250 100	50	1	6.8
130222.5L78X.XX1.XXX	550 250 100	50	1	6.8

Type: O13, O14, O15, O16 optics

130222.6L30X.XX1.XXX	550 250 100	50	1	7.0
130222.6L84X.XX1.XXX	550 250 100	50	1	7.0
130222.6L31X.XX1.XXX	550 250 100	50	1	7.0
130222.6L85X.XX1.XXX	550 250 100	50	1	7.0
130222.6L32X.XX1.XXX	550 250 100	50	1	7.0
130222.6L86X.XX1.XXX	550 250 100	50	1	7.0

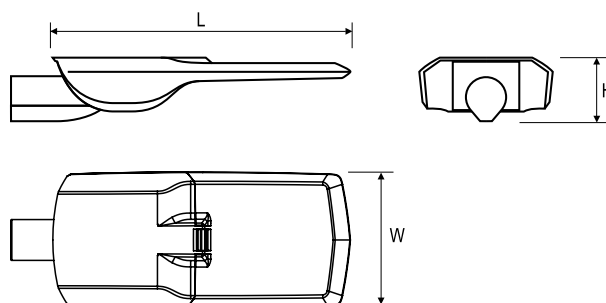

* Lower temperature range: -40°C to -20°C, depending on the type of power supply used (consultation with the LUG Technical Preparation of Production Branch is required).

Please note that the standard luminaire is not intended for use in an environment with an increased corrosivity category. The use of the luminaire for work in an environment for which additional corrosion protection is necessary requires the use of an index with the extension .985 (on request).

In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Date of issue: 27-12-2021

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
Type: O13, O14, O15, O16 optics				
130222.6L33X.XX1.XXX	550 250 100	50	1	7.0
130222.6L87X.XX1.XXX	550 250 100	50	1	7.0
130222.6L34X.XX1.XXX	550 250 100	50	1	7.0
130222.6L88X.XX1.XXX	550 250 100	50	1	7.0
130222.6L35X.XX1.XXX	550 250 100	50	1	7.0
130222.6L89X.XX1.XXX	550 250 100	50	1	7.0
130222.6L36X.XX1.XXX	550 250 100	50	1	7.0
130222.6L90X.XX1.XXX	550 250 100	50	1	7.0
Type: O2, O3, O4, O5, O6P, O6L, O7, O8, O26, O59, O60, O61, O84, O85 optics				
130222.5L42X.XX1.XXX	550 250 100	50	1	6.8
130222.5L01X.XX1.XXX	550 250 100	50	1	6.8
130222.5L43X.XX1.XXX	550 250 100	50	1	6.8
130222.5L13X.XX1.XXX	550 250 100	50	1	6.8
130222.5L44X.XX1.XXX	550 250 100	50	1	6.8
130222.5L04X.XX1.XXX	550 250 100	50	1	6.8
130222.5L45X.XX1.XXX	550 250 100	50	1	6.8
130222.5L07X.XX1.XXX	550 250 100	50	1	6.8
130222.5L46X.XX1.XXX	550 250 100	50	1	6.8
130222.5L10X.XX1.XXX	550 250 100	50	1	6.8
Type: O2, O3, O4, O5, O6P, O6L, O7, O8, O26 optics				
130222.5L02X.XX1.XXX	550 250 100	50	1	6.8
130222.5L14X.XX1.XXX	550 250 100	50	1	6.8
130222.5L05X.XX1.XXX	550 250 100	50	1	6.8
130222.5L08X.XX1.XXX	550 250 100	50	1	6.8
130222.5L11X.XX1.XXX	550 250 100	50	1	6.8
Type: OP2 optics				
130222.5L731.111.XXX	550 250 100	50	1	6.8

* Lower temperature range: -40°C to -20°C, depending on the type of power supply used (consultation with the LUG Technical Preparation of Production Branch is required).

Please note that the standard luminaire is not intended for use in an environment with an increased corrosivity category. The use of the luminaire for work in an environment for which additional corrosion protection is necessary requires the use of an index with the extension .985 (on request).

In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Date of issue: 27-12-2021

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

OTHER PICTURES



Luminaire with tool-free access to the power supply chamber (on request)

Luminaire with holder for mounting on a Ø76mm pillar (on request)

.867

.867

ACCESSORIES



□ 150170.00818
■ 150173.00906

Wall bracket Ø60mm



■ 150175.01106
□ 150172.01096

Rear-side louvers for URBINO LED luminaires



■ 150175.01107
□ 150172.01097

Side louvers for URBINO LED luminaires

* Lower temperature range: -40°C to -20°C, depending on the type of power supply used (consultation with the LUG Technical Preparation of Production Branch is required).

Please note that the standard luminaire is not intended for use in an environment with an increased corrosivity category. The use of the luminaire for work in an environment for which additional corrosion protection is necessary requires the use of an index with the extension .985 (on request).

In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com


Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Date of issue: 27-12-2021

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

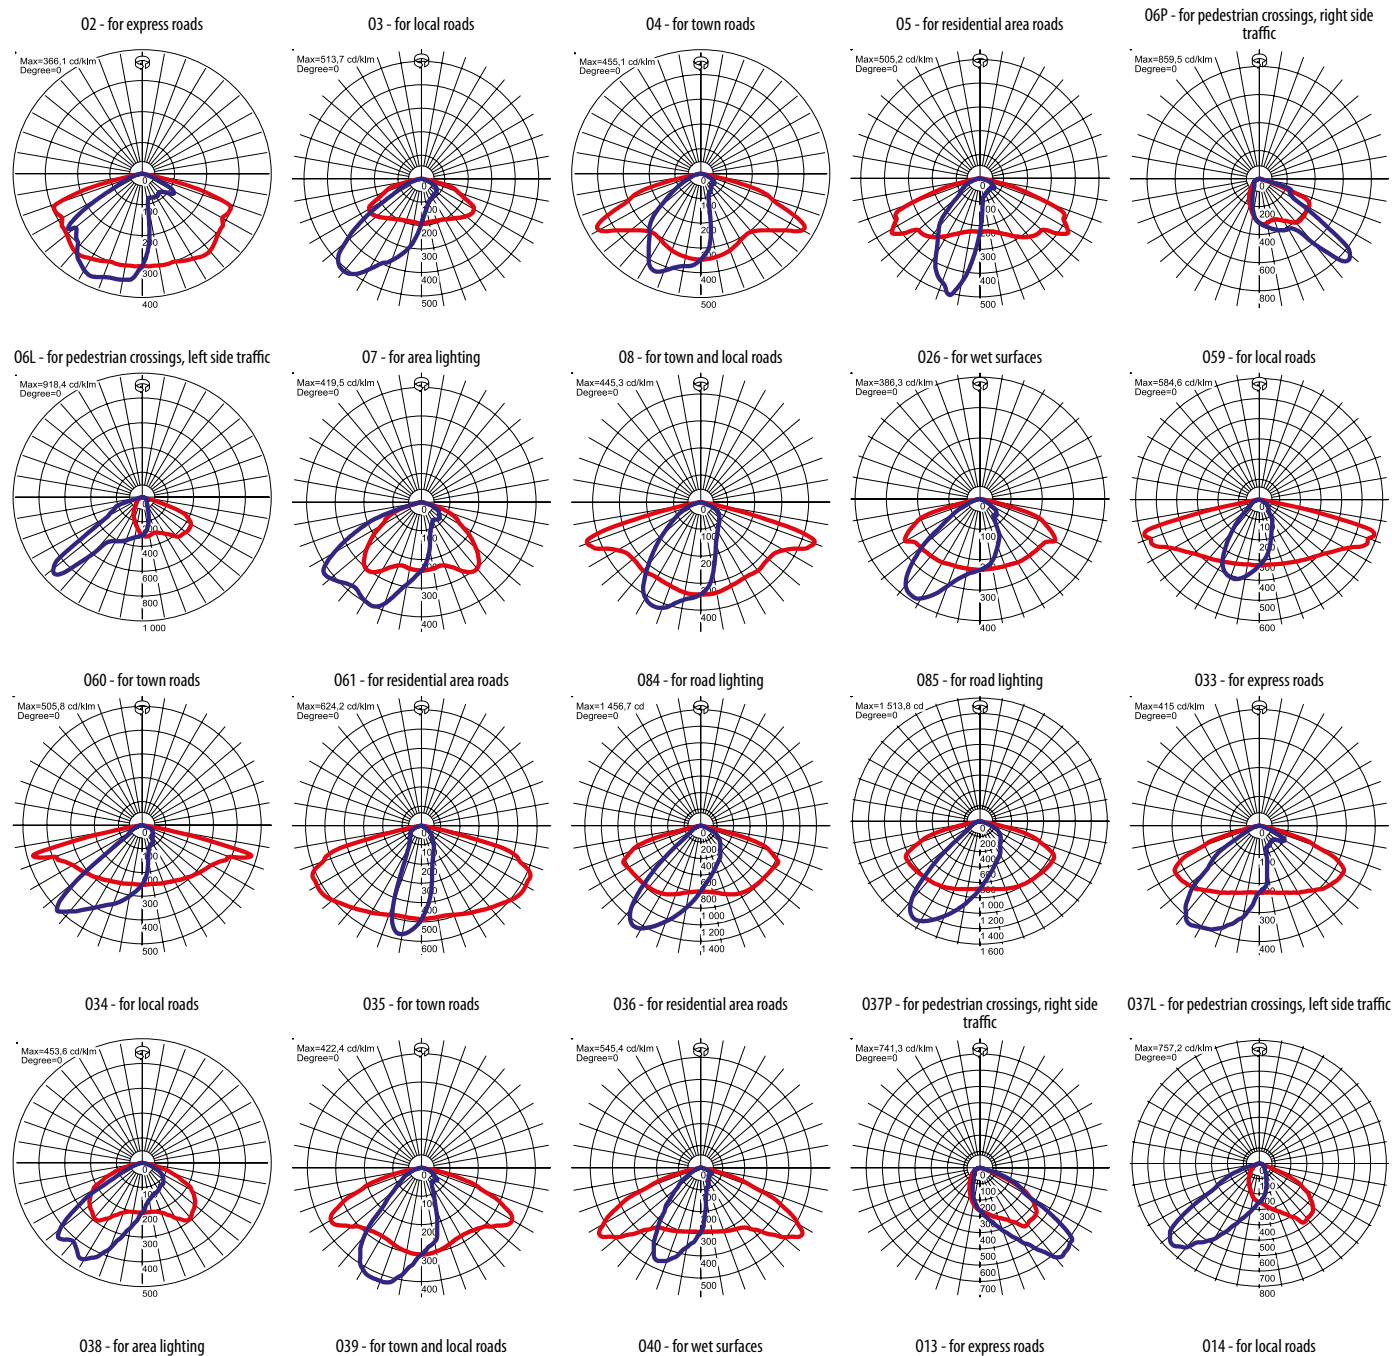LIGHT BEAM CURVES

* Lower temperature range: -40°C to -20°C, depending on the type of power supply used (consultation with the LUG Technical Preparation of Production Branch is required).

Please note that the standard luminaire is not intended for use in an environment with an increased corrosivity category. The use of the luminaire for work in an environment for which additional corrosion protection is necessary requires the use of an index with the extension .985 (on request).

In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com


Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for $T_a = 25^\circ\text{C}$.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Date of issue: 27-12-2021


The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires








015 - for town roads



016 - for residential area roads



OP2



* Lower temperature range: -40°C to -20°C, depending on the type of power supply used (consultation with the LUG Technical Preparation of Production Branch is required).

Please note that the standard luminaire is not intended for use in an environment with an increased corrosivity category. The use of the luminaire for work in an environment for which additional corrosion protection is necessary requires the use of an index with the extension .985 (on request).

In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com


Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for $T_a = 25^\circ\text{C}$.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Date of issue: 27-12-2021

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

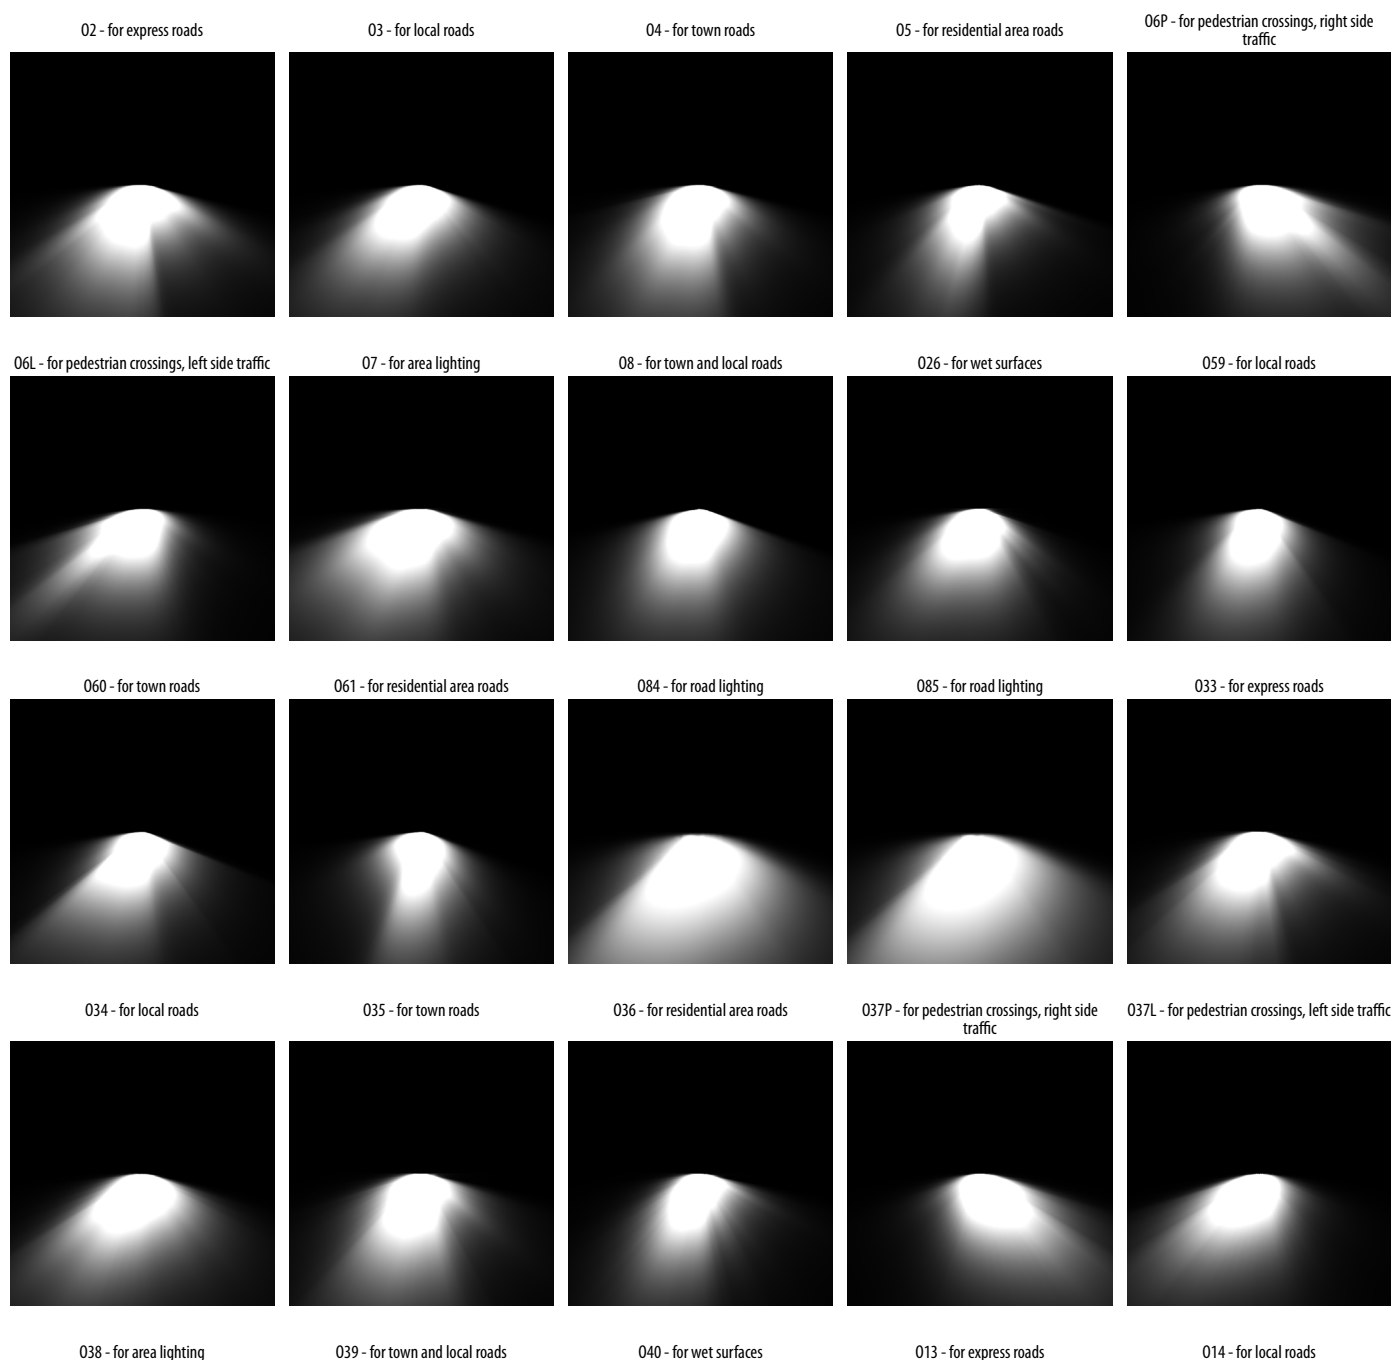WAY OF LIGHTING

* Lower temperature range: -40°C to -20°C, depending on the type of power supply used (consultation with the LUG Technical Preparation of Production Branch is required).

Please note that the standard luminaire is not intended for use in an environment with an increased corrosivity category. The use of the luminaire for work in an environment for which additional corrosion protection is necessary requires the use of an index with the extension .985 (on request).

In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for $T_a = 25^\circ\text{C}$.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Date of issue: 27-12-2021

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires




015 - for town roads



016 - for residential area roads



OP2



* Lower temperature range: -40°C to -20°C, depending on the type of power supply used (consultation with the LUG Technical Preparation of Production Branch is required).

Please note that the standard luminaire is not intended for use in an environment with an increased corrosivity category. The use of the luminaire for work in an environment for which additional corrosion protection is necessary requires the use of an index with the extension .985 (on request).

In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for $T_a = 25^\circ\text{C}$.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Date of issue: 27-12-2021


The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires

OTHER PROJECTS

Zjednoczenia Avenue, Zielona Góra, Poland



Olszyna, Poland

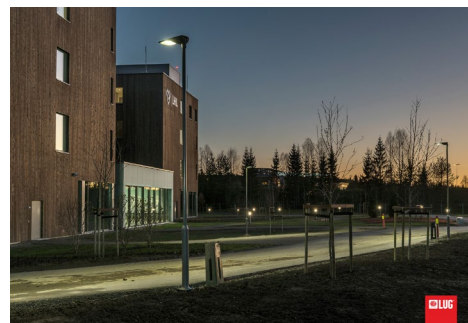

LHL Hospital, Oslo, Norway




Preussen, Ludwigsfelde, Germany



Westerplatte, Zielona Góra, Poland




Transfer Center, Zielona Góra, Poland

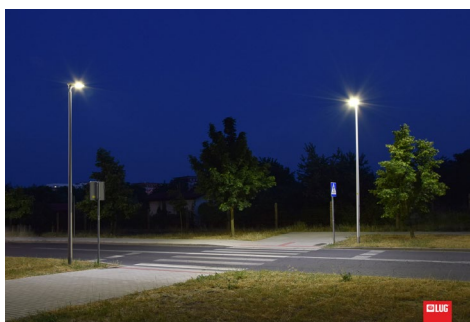

Zdrojowa, Zielona Góra, Poland



Herberta, Zielona Góra, Poland

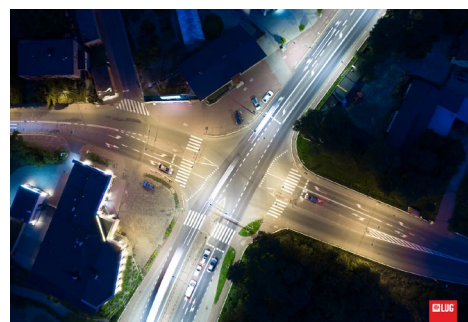

Komorniki, Poland



Moszczenica, Poland



A2 bypass, Poznań, Poland



Carrickmines Park, Dublin, Ireland

* Lower temperature range: -40°C to -20°C, depending on the type of power supply used (consultation with the LUG Technical Preparation of Production Branch is required).

Please note that the standard luminaire is not intended for use in an environment with an increased corrosivity category. The use of the luminaire for work in an environment for which additional corrosion protection is necessary requires the use of an index with the extension .985 (on request).

In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Date of issue: 27-12-2021


The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires




Kaunas, Lithuania

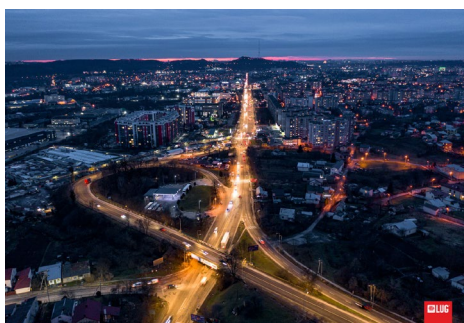


Chmielnicki Street, Lviv, Ukraine

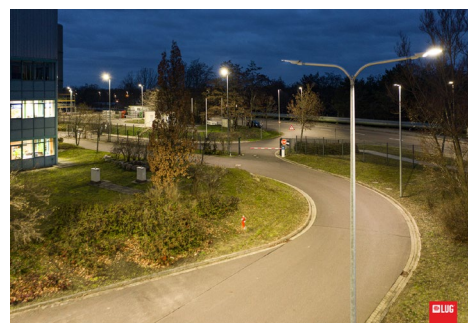

Powerplant, Cottbus, Germany

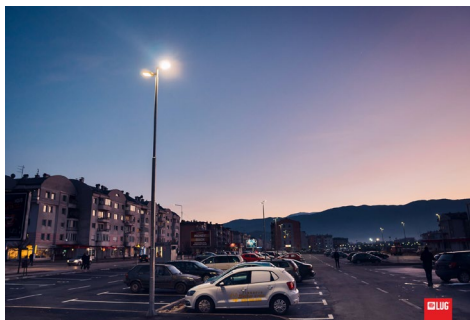

Sarajevo, Bosnia and Herzegovina

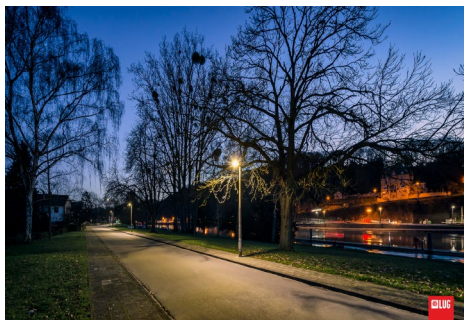

Namur, Belgium

* Lower temperature range: -40°C to -20°C, depending on the type of power supply used (consultation with the LUG Technical Preparation of Production Branch is required).

Please note that the standard luminaire is not intended for use in an environment with an increased corrosivity category. The use of the luminaire for work in an environment for which additional corrosion protection is necessary requires the use of an index with the extension .985 (on request).

In order to apply the luminaire in an aggressive environment, for example with an increased concentration of sulfur, salt or other aggressive substances, a consultation with the LUG Technical Preparation of Production Branch is required.

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info and General Warranty Terms available on our website www.luglightfactory.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Date of issue: 27-12-2021

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires