

220-240V
50/60 HzIK
05IP
20

Decorative lighting luminaire for LED light sources.

TECHNICAL DATA**Mounting:** suspended on a cable**Body:** steel, powder-coated aluminum, PC plastic**Colour:** white, black**Diffuser:** opal matt (PMMA), transparent (PMMA)**ELECTRICAL DATA****Power supply efficiency:** >80%**Power:** 220-240V 50/60Hz**Includes light source:** yes**Type of equipment:** ED**Electrical connection:** cable 1,5 m; 2-pole connector**OPTICAL DATA****Light distribution:** rotationally-symmetric**Way of lighting:** direct**GENERAL DATA****Lifetime (L80B10):** 50 000 h**Operating temperature range:** 0° C ... +35° C**Warranty:** 5 years**Application:** hotels, residences, interiors**Additional information:** A perfect combination of aesthetics and ergonomics, classic elegance.


Code	Diffuser	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Type: Ø 280						
26009X.5L01.202	opal matt (PMMA)	6	640	107	2700	80
26009X.5L01.201	transparent (PMMA)	6	640	107	2700	80
26009X.5L02.202	opal matt (PMMA)	6	710	118	3000	80
26009X.5L02.201	transparent (PMMA)	6	710	118	3000	80
26009X.5L03.201	transparent (PMMA)	6	740	123	4000	80
26009X.5L03.202	opal matt (PMMA)	6	740	123	4000	80

26009 .5L01.201

Colour

1 white3 black

Code	Dimensions [mm] LW	Pallet quantity	Quantity in package	Net weight [kg]
Type: Ø 280				
26009X.5L01.202	192 280	48	1	1.0
26009X.5L01.201	192 280	48	1	1.0
26009X.5L02.202	192 280	48	1	1.0
26009X.5L02.201	192 280	48	1	1.0
26009X.5L03.201	192 280	48	1	1.0
26009X.5L03.202	192 280	48	1	1.0



Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.


The parameters in the data sheet are given for Ta=25°C.

Colour temperature tolerance +/- 5%.


OTHER PICTURES



LIGHT BEAM CURVES

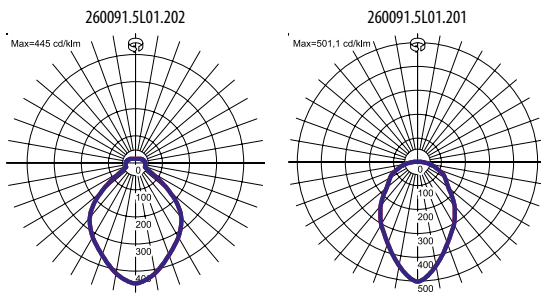

WAY OF LIGHTING

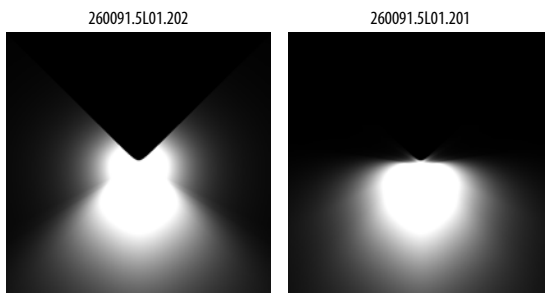

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.
Power tolerance +/- 5%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for $T_a=25^{\circ}\text{C}$.

Colour temperature tolerance +/- 5%.