






PROFILE/ m

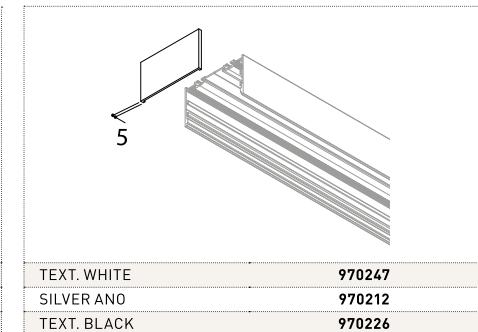


ENDCAP

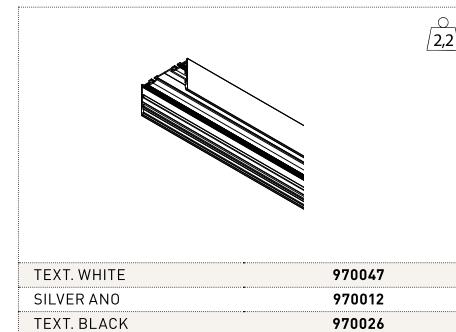


SECTION VIEW SURFACE

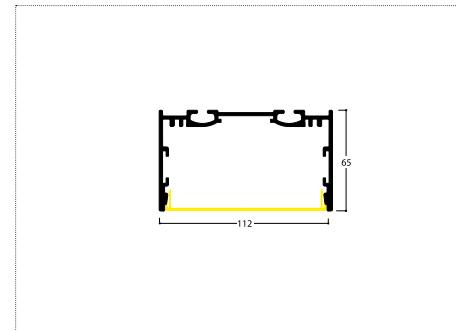


SECTION VIEW SUSPENDED

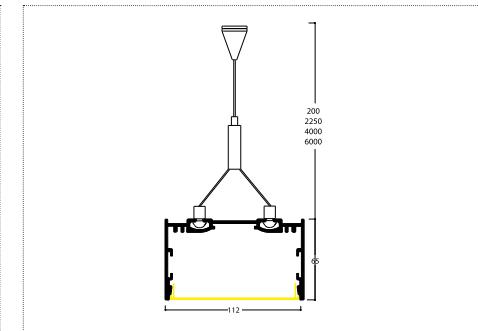


EXTRA CIRCUIT/ m

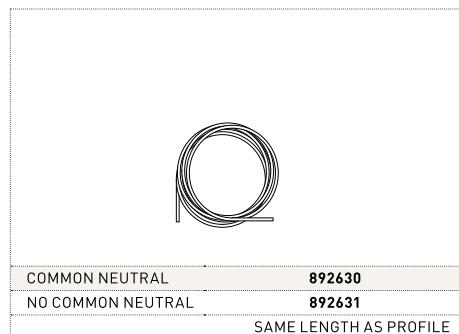


DIFFUSER/ m

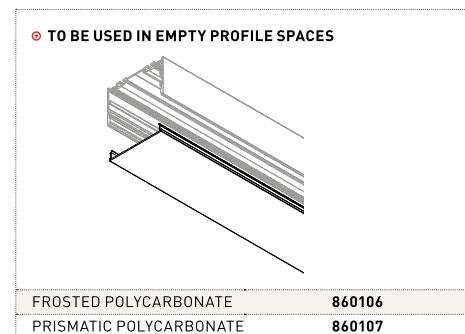

COVER/ m


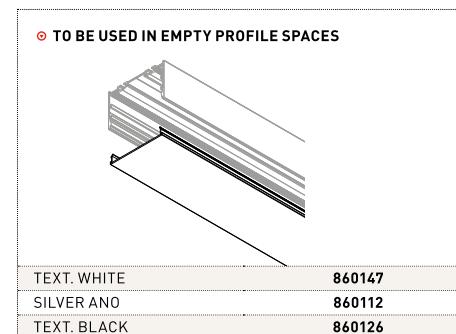


WALL FIXATION

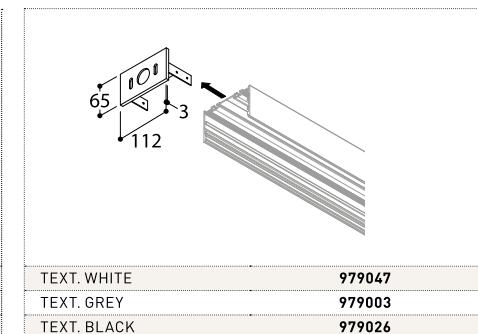




CONNECTION SET SQUARE




	3p			5p		
	2,25 m	4 m	6 m	2,25 m	4 m	6 m
TEXT. WHITE	890847	890947	891047	891147	891247	891347
TEXT. BLACK	890826	890926	891026	891126	891226	891326


STRAIGHT CONNECTION

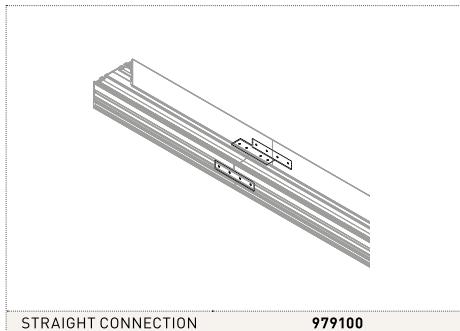

CORNER

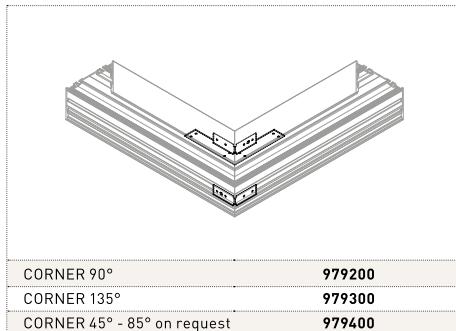


CONNECTION SET ROUND



	3p			5p		
	2,25 m	4 m	6 m	2,25 m	4 m	6 m
TEXT. WHITE	691047	691147	691247	691347	691447	691547
TEXT. BLACK	691026	691126	691226	691326	691426	691526

SUSPENSION KIT

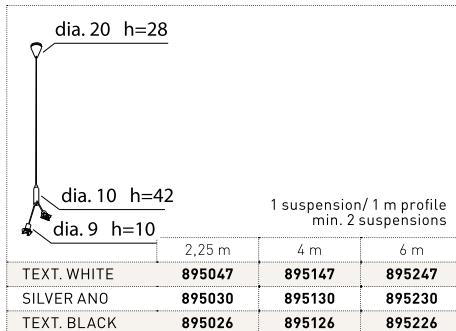

CONNECTION SET KOSMOS (recessed)



Ø 56 mm
Installation height 60 mm

	3p			5p		
	2,25 m	4 m	6 m	2,25 m	4 m	6 m
TEXT. WHITE	691057	691157	691257	691357	691457	691557
TEXT. BLACK	691036	691136	691236	691336	691436	691536

BORITI

profiles




LEDSYSTEM DOUBLE ROW HE - 4630 lm/meter

LED LAMPS	DIFFUSER	IP	2700K		3000K		4000K		POWER (W)	LENGTH /mm	LENGTH /ft
			NOT DIMM	DALI/TOUCH	NOT DIMM	DALI/TOUCH	NOT DIMM	DALI/TOUCH			
BORITI DOUBLE LEDLINE 2x1300lm	FROSTED POLYCARBONATE	IP 40	971726	971722	971724	971720	971725	971721	14	560	2
	PRISMATIC POLYCARBONATE	IP 40	971626	971622	971624	971620	971625	971621			
BORITI DOUBLE LEDLINE 3x1300lm	FROSTED POLYCARBONATE	IP 40	971736	971732	971734	971730	971735	971731	21	840	3
	PRISMATIC POLYCARBONATE	IP 40	971636	971632	971634	971630	971635	971631			
BORITI DOUBLE LEDLINE 4x1300lm	FROSTED POLYCARBONATE	IP 40	971746	971742	971744	971740	971745	971741	28	1120	4
	PRISMATIC POLYCARBONATE	IP 40	971646	971642	971644	971640	971645	971641			
BORITI DOUBLE LEDLINE 5x1300lm	FROSTED POLYCARBONATE	IP 40	971756	971752	971754	971750	971755	971751	35	1400	5
	PRISMATIC POLYCARBONATE	IP 40	971656	971652	971654	971650	971655	971651			
BORITI DOUBLE LEDLINE 6x1300lm	FROSTED POLYCARBONATE	IP 40	971766	971762	971764	971760	971765	971761	42	1680	6
	PRISMATIC POLYCARBONATE	IP 40	971666	971662	971664	971660	971665	971661			
BORITI DOUBLE LEDLINE 7x1300lm	FROSTED POLYCARBONATE	IP 40	971776	971772	971774	971770	971775	971771	49	1960	7
	PRISMATIC POLYCARBONATE	IP 40	971676	971672	971674	971670	971675	971671			
BORITI DOUBLE LEDLINE 8x1300lm	FROSTED POLYCARBONATE	IP 40	971786	971782	971784	971780	971785	971781	56	2240	8
	PRISMATIC POLYCARBONATE	IP 40	971686	971682	971684	971680	971685	971681			
BORITI DOUBLE LEDLINE 9x1300lm	FROSTED POLYCARBONATE	IP 40	971796	971792	971794	971790	971795	971791	63	2520	9
	PRISMATIC POLYCARBONATE	IP 40	971696	971692	971694	971690	971695	971691			
BORITI DOUBLE LEDLINE 10x1300lm	FROSTED POLYCARBONATE	IP 40	971706	971702	971704	971700	971705	971701	70	2800	10
	PRISMATIC POLYCARBONATE	IP 40	971606	971602	971604	971600	971605	971601			


BORITI




SECTION VIEW

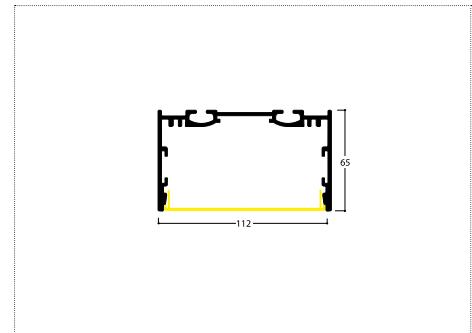

SECTION VIEW SUSPENDED

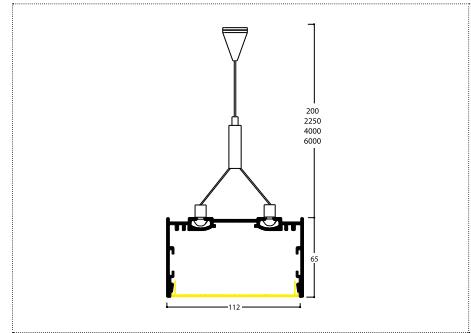

Zhaga

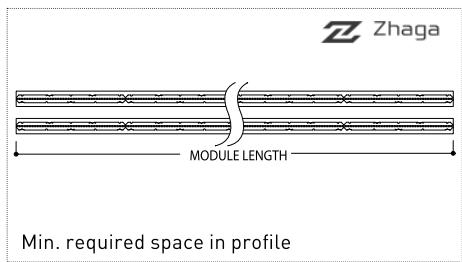


Min. required space in profile

INPUT VOLTAGE 230V AC

profiles

BORITI

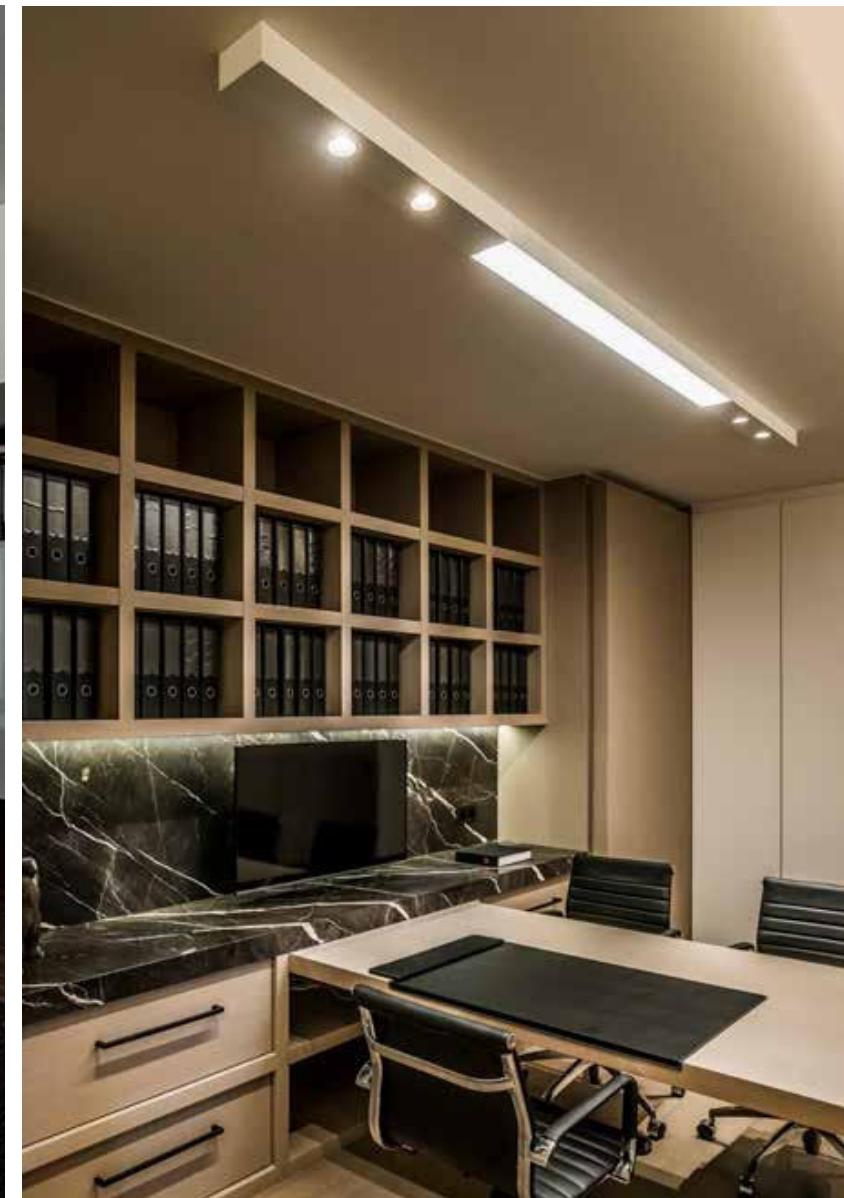





MODULE 1 x BEAUFORT

	CITIZEN 6,22W 230 V - AC 758 lumen not dimmable	CRI 92 ↔ 359° ⚡ 30° beam 36°
	2700K	3000K
TEXT. WHITE	972047	972057
TEXT. BLACK	972026	972036
① COVER TEXT. WHITE P/M ① COVER ANO P/M ① COVER TEXT. BLACK P/M	860147 860112 860126	

MODULE 1 x BEAUFORT dim 1-10V

	CITIZEN 6,22W 230 V - AC 758 lumen dimmable 1-10V	CRI 92 ↔ 359° ⚡ 30° beam 36°
	2700K	3000K
TEXT. WHITE	972247	972257
TEXT. BLACK	972226	972236
① COVER TEXT. WHITE P/M ① COVER ANO P/M ① COVER TEXT. BLACK P/M	860147 860112 860126	

MODULE 1 x BEAUFORT dim DALI

	CITIZEN 6,22W 230 V - AC 758 lumen dimmable DALI	CRI 92 ↔ 359° ⚡ 30° beam 36°
	2700K	3000K
TEXT. WHITE	972447	972457
TEXT. BLACK	972426	972436
① COVER TEXT. WHITE P/M ① COVER ANO P/M ① COVER TEXT. BLACK P/M	860147 860112 860126	

MODULE 2 x BEAUFORT dim 1-10V

	CITIZEN 6,22W 230 V - AC 758 lumen dimmable 1-10V	CRI 92 ↔ 359° ⚡ 30° beam 36°
	2700K	3000K
TEXT. WHITE	972347	972357
TEXT. BLACK	972326	972336
① COVER TEXT. WHITE P/M ① COVER ANO P/M ① COVER TEXT. BLACK P/M	860147 860112 860126	








profiles

HOW TO COMPOSE BORITI

REQUEST CUSTOMER	
SLIM PROFILE 2,02 M	
BLACK COLOR	
8 ORIENTABLE LED SPOTLIGHTS	
SUSPENDED	
DIM PROTOCOL 1-10V	

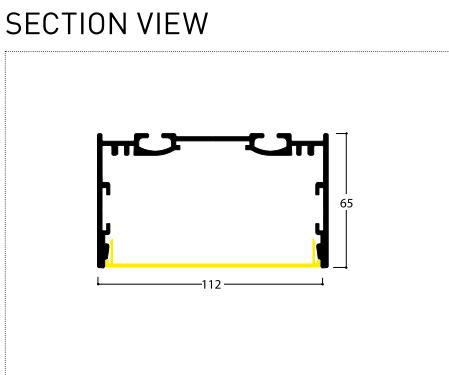

TAL
TECHNICAL
ARCHITECTURAL
LIGHTING

ORDERFORM

REFERENCE	DESCRIPTION	PCS / M
970026	PROFILE TEXT BLACK	2,02
860126	COVER TEXT BLACK	2,02
970226	ENDCAP TEXT BLACK	2
972326	MODULE 2XBEAUFORT DIM 1-10V	4
895026	SUSPENSION SET	3
891126	BASE + CABLE 5P	1

DRAWING

TOP VIEW

970226 970026 + 860126 891126 895026

2020

2XBeaufort dim 1-10V 972326

2XBeaufort dim 1-10V 972326

2XBeaufort dim 1-10V 972326

2XBeaufort dim 1-10V 972326